




SOFiSTiK

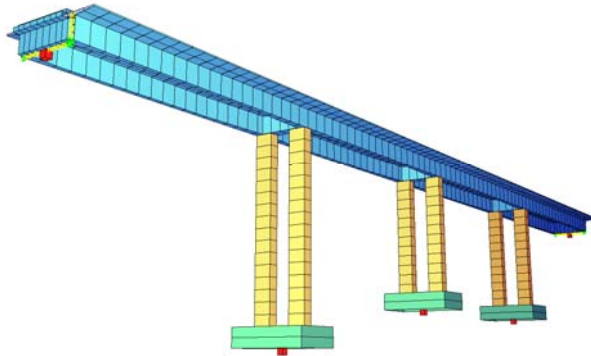

Generalsanierung Waltenbachbrücke

Generalinstandsetzung einer 4-feldrigen
Spannbetonrahmenbrücke mit Widerlagerumbau.
Betoninstandsetzung, Erneuerung der Abdichtung, der
Randbalken, des Fahrbahnbelags und der Brückenausrüstung

Bauherr/Auftraggeber:

ASFiNAG Baumanagement GmbH
Modecenterstraße 16
A-1030 Wien

Kontakt: DI Christian Eckhardt
+43(0)664 /60108 14241

Bauwerksdaten:

Statisches System: Spannbetonrahmenbrücke
Stützweite: 4*35,0m= 140,0m
Brückenlänge: 140,0m
Brückenbreite: 12,50m pro Richtungsfahrbahn
Gesamtkosten: ca. € 1,4Mio exkl. Ust.
Leistungszeitraum von S+W: Mai 2012 – Juni 2013
Fertigstellung des Objektes: 2013

Von S+W erbrachte Leistungen:

Genereller Entwurf
Ausschreibungsplanung
statische Berechnung
Detailplanung
Bauphasenplanung

General overhaul of the Waltenbach- bridge

General overhaul of a 4-span prestressed concrete frame bridge
with structural change of the abutments. Concrete
refurbishment, overhaul of the waterproofing, the edge beam,
the carriageway surfacing and the bridge installations.

owner/client:

ASFiNAG Baumanagement GmbH
Modecenterstraße 16
A-1030 Wien

contact: DI Christian Eckhardt
+43(0)664 /60108 14241

Information about the building:

structural system: prestressed concrete frame bridge
open span: 4*35,0m= 140,0m
bridge length: 140,0m
bridge breadth: 12,50m each carriageway
total costs: about € 1,4Mio excl. VAT
period of performance by S+W: May 2012 – June 2013
completion of the object: 2013

services rendered by S+W:

general design
tender design
structural analysis
detailed design
schedule of the phases of the construction work